



## Titus BBD Delay v1.0.1

Produced and Designed by Matt Black  
Coding by Pitchblende Ltd for Jiggery-Pokery

© 2014 Jiggery-Pokery Sound

All rights reserved.

“Reason”, “Rack Extension” and associated logos are trademarks of Propellerhead Software AB.

All commercial symbols are protected trade names of their holder and their inclusion within this guide and the associated Reason Rack Extension product are merely indicative and do not constitute endorsement of this product by any party.



[www.jiggery-pokery.com](http://www.jiggery-pokery.com)



# Titus BBD Delay



*Titus* is a 1U delay, based on the classic Bucket Brigade Delay integrated circuits of the 1970s and 1980s, found in many classic delay pedals.

## BBD Delay

A BBD is a type of Integrated Circuit (IC), which is a Sample & Hold device with a fixed number of stages, known as a delay line; an audio input would be held as if it was a bucketful of water being passed along a line of people (hence, “bucket brigade”). For a chip such as the SAD512D, think of it as if there were 512 people in that line. Other BBD ICs had differing lengths, up to 4096 stages.

## Titus overview


For *Titus* we have taken a single BBD channel from *Steerpike* and made it into a compact 1U device. Several useful features from *Steerpike* are carried over.

The delay time can be set by the number of BBD stages (**#**), time (**ms**) or tempo synced to the Reason transport (**D—S**). For the first time in Reason, tempo sync ranges are no longer entirely determined and limited by the designer: you can select any beat division from  $/2$  (minim) to  $/16$  (semiquaver) and all halved and triplet steps up to  $/256$  using the **S** control, and any the number of delays to that division using the **D** control, from 1 to 16. Thus you can create flexible and creative tempo synced delay times such as  $3/7$ ,  $14/96$ ,  $3/2$ ,  $5/3$ ,  $2/15$  as well as the Reason standard  $3/16$ ,  $1/8$  and so on.

The delay line supports up to eight seconds of delay time, regardless of the sample rate or song tempo, and can be set as a reverse delay without feedback.

*Titus* also has a Tap Out and Tap In audio connection, essentially send and return breakout jacks for feedback loops. The Tap In has its own feedback adjust on the front panel.

Unlike Reason’s native DDL-1 delay device, *Titus* can operate both as true mono-to-stereo (by panning a mono signal and delay signal to opposite stereo positions) and as dual mono for handling stereo inputs on two separate delay lines, although note that the same parameters are shared between both left and right channels. Thus *Titus* offers a useful alternative setup to the old Reason half-rack delay, which sums stereo inputs to mono first. For stereo with different parameters for each channel, use two devices in mono as you would with DDL-1.

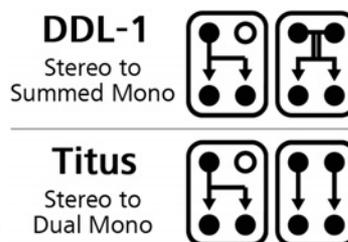

## Controls

### Bypass/On/Off Switch

This is an important control! In an emergency, if the delay audio is doing things you would rather it not be doing, set this to **Off** to immediately stop audio output. This will also purge all the delay lines. Setting to Bypass will not clear the delay lines.

### BBD

Use this button to switch between **BBD** mode and **IDL** (Interpolated Delay Line) mode. Unlike *Steerpike*, BBD mode in *Titus* uses a fixed clock rate and fixed frequency anti-aliasing low-pass filter.

**IDL** is the typical software digital delay. With **IDL** mode you will avoid aliasing entirely. More usefully it will allow you to have longer feedbacks, even infinite feedbacks, without the sound degradation that would occur when using **BBD** mode (or with

---

tape-style delays like The Echo), even with **THD** at minimum: for *Titus* the internal filter is disabled in **IDL** mode, allowing the signal's full frequency range to pass through the delay. This is in contrast to *Steerpike*, where the filter can be manually set as required in either mode. As with **Bypass/On/Off Switch** Off, switching **BBD** mode will also instantly clear the delay lines.

### DL In (Audio to Delay Line In)

This useful oversized button turns the delay line gate off and on. If turned off, no audio enters the delay lines, and is only passed to the Dry/Wet mixer in the Dry output. When on, the audio is passed to the delay lines.

What is particularly useful about the **DL In** function is that turning it off doesn't clear the delay line, so it allows you to shut off new audio into the delay line while still allowing the already delayed audio in them to progress and finish playing. With infinite delays—where feedback set to 100%—this is especially important, as you can effectively record the delay like a loop, letting it play indefinitely, while shutting off the delay line input to prevent it swamping the dry signal as you continue playing a unique input over the top with the dry signal.

Try mapping **DL In** to your sustain pedal for delay-sustain.

### Delay Mode

*Titus* features two modes, using the **Direction** switch: Forward delay or Reverse delay. Reverse delay does not use the Feedback. Reverse delays are complex to produce, since of course we cannot predict the future: everything we want to reverse must be in the delay buffer *before* we can reverse it! To get a reverse delay with feedback is even more complex, as it requires two buffers, one for the delay and feedback, and another to reverse it. For example, to reverse delay a one second block of audio with feedback requires up to three seconds of delay: the first to delay and add feedback, and up to two seconds for the reverse (since the reverse recording is free-running, its point of recording the loop may not be where you need it). You also cannot, for most practical scenarios, have the reverse in the same buffer as the feedback or else you will get a forward-reverse-forward-reverse effect.

To use Reverse delay with feedback, is it therefore more logical to use two *Titus* devices in series, one set to Forward, one set to Reverse, which provides more flexibility by providing different delay lengths via adjusting their delay times separately.

When Reverse delay is enabled the display will feature a blue metronome lamp in the upper right of their **Delay Time** display to help you time triggering and recording of the loop. As you may find you need to predict the future, it is likely there will be scenarios where to get the reverse ending at precisely the correct moment, such as at the end of a bar, you will have to record the trigger and manually move the required clips until the timing is correct. The key to understanding and using reverse delay is to remember that the reverse delay should end at twice the delay time you have set. So for a 1 bar delay the *first* transient of the input signal should arrive at the *end* of the second bar. See page 6 for further guidance.

### Delay Time

To set the **Delay Time** click your mouse on display to adjust the delay time. There are three different ways you can set the delay time, by clicking on the LED below the display to change the delay time mode.

- **Stages (#)**: Use this mode to set the fixed number of stages the BBD uses, from 2 to 16,384. The hold time between each stage is fixed.
- **Time (ms)**: This mode allows you to set the delay time in milliseconds (0.01–999ms) or seconds (1.0–8.0s). In **BBD** mode *Titus* converts these to the required number of Stages.
- **Tempo Sync (D—S)**: These two controls allow you to independently set duration and subdivision for tempo sync values. In **BBD** mode *Titus* converts these to the required number of Stages. *Titus* will operate in tempo sync mode with either **D** or **S** LEDs selected. Default is 3/16.

## Why two Tempo Sync values?

Normally in Reason devices you are given a fixed list of tempo synced values by the designer of the device. This list usually has to be fairly short so as not to be overwhelming, but has the disadvantage of providing a limited range of rates, at a limited range of BPMs with which to use them.

In *Titus* the delay itself can be freely set to a massive range of creatively tempo synced delay times by adjusting the **Subdivision** (the right hand number, the beat division) and the **Duration** (the left hand number, the duration, or number of beats at the set subdivision). While some settings are going to be the same as others, (e.g. 2/128 is the same as 1/64), you can simply dial in the precise number you want rather than have to work out what is equivalent to what. You can select from 1 to 16 beats over 36 subdivisions: that's 576 possible tempo synced delay lengths, per BBD. For displaying the length we have, for consistency, used US style numeric subdivision values, from /2 (Half Note) to /256 (Two Hundred and Fifty-Sixth Note). The most important ones you may wish to be aware of are /16 (Sixteenth Note/Semiquaver), /12 (Triplet quaver), which is often listed in Reason as 8T, and /24 (Triplet semiquaver), aka /16T.

Steerpike Duration	Steerpike Subdivision	Equivalent to:
1 to 16	/256	
1 to 16	/192	/128T
1 to 16	/128	Demisemihemidemisemiquaver
1 to 16	/96	/64T
1 to 16	/64	
1 to 16	/48	/32T
1 to 16	/32	Thirty-Second Note Triplet Thirty-Second Note / Demisemiquaver
1 to 16	/24	/16T
1 to 16	/20	Sixteenth Note Triplet
1 to 16	/16	Sixteenth Note Quintuplet Sixteenth Note / Semiquaver
1 to 16	/15	
1 to 16	/14	
1 to 16	/13	
1 to 16	/12	/8T
1 to 16	/11	Eighth Note Triplet
1 to 16	/10	
1 to 16	/9	
1 to 16	/8	Eighth Note / Quaver
1 to 16	/7	Quarter Note Septuplet
1 to 16	/6	/4T
1 to 16	/5	Quarter Note Sextuplet
1 to 16	/4	Quarter Note Quintuplet
1 to 16	/4	Quarter Note / Crochet
1 to 16	/3	/2T
1 to 16	/3	Half-note triplet
1 to 16	/2	Half Note / Minim

Naturally /16 is the most useful at typical BPMs, so /16 is the default for the **Subdivision** value. If requiring just /16 values, you'll only ever need to change the **Duration** figure and do not need to look at the /Subdivision value. At slow BPMs however, you might find it's easier to use /32 or even /64, while at very fast BPMs /8 or /4 become useful.

But we only have a delay buffer of eight seconds! Well actually eight seconds is a *very* long time for a delay. It's likely to be rare you'd need a delay time that long: if you have a *really* long delay time, such as 16/2 and your song is 58 BPM, or perhaps you have set a delay time of 16/4 and a song tempo of 27 BPM, in both cases the required buffer size for that delay to be achievable is too big when in **IDL** mode and will trigger the **MEM** warning lamp to the left of the **Delay Time** display. The delay time will still be limited to eight seconds. If you need that 16/4 delay time at lower than 28 BPM, then you can still use multiple *Titus* devices in series.

---

## Level

Centre is zero output level. Increase the value to the right to set the Wet level into the Dry/Wet mixer. Increase the value to the left for a phase inverted and high pass filtered output.

## Pan

For a mono input this sets the stereo position of the delayed output. For a stereo input **Pan** controls the balance between left and right delayed outputs.

## Feedback

Use this control to set the number of repeats before the delay subsides. *Titus's* **Feedback** control provides up to 100% Feedback for infinite delay. In **BBD** mode destructive interference because of sample & hold will still cause the delay to fade, so **IDL** mode will normally be the preferred option when you require a continuous, non-fading repetition that will continue until you clear the delay line, but even then in **IDL** mode for infinite delays you will likely not want to use EQ or LFO modulation.

**Feedback** is not available in Reverse mode.

## THD [Total Harmonic Distortion]

Harmonic distortion is introduced by BBD circuits. The more stages in the BBD the more distortion is introduced. The **THD** knob controls the Total Harmonic Distortion produced. Typically you might expect approximately 1% of THD per 1,024 stages. In *Steerpike* you can drive the THD from zero right up to 36% independently of the number of stages, although that 36% figure is fairly arbitrary: it's based on a sine wave of 80Hz at a particular input level, so the *actual* THD amount, as you would therefore expect, will not necessarily reflect what is set by this control.

The effect of this control will be most obvious on signals with less harmonics to begin with.

## Tap

This control adjusts the feedback level of the **Tap In** audio jack. **WARNING: There is a serious risk of a loud feedback loops with high Feedback and Tap In levels. Use Tap with caution: reduce levels first and increase gradually!**

## Mod

Adjusts the depth/amount of delay time modulation from the Mod CV Input. For best results leave the rear Mod CV Trim Knob at maximum and only use the front panel **Mod** control.

## Dry Level

Adjust the level of the Dry signal into the Dry/Wet mixer.

## Dry Pan

An incredibly useful feature, this allows you to set the pan position of the Dry signal. Reason's SSL Mixer does not handle insert delays particularly well, as if you have, for example, a delay on the left channel and want the dry on the right, it can't actually be done adequately via SSL at all. Pan the SSL channel right and you lose the delayed left signal. So traditionally one has typically needed to add insert delays using the extra hassle of setting up a Line Mixer or ReMix and bypass the SSL pan-ner entirely to allow for both wet and dry to be panned differently.

If the input is mono this control will pan the dry signal left or right. If the input is stereo the control adjusts the balance between left and right.

## Dry/Wet

Predictably, this knob controls the amount of Dry and Delayed signal in the output.

## Back panel connections

On the back are CV inputs for the DL In, which acts as an input gate, and useful set of additional CV modulation jacks. "Delay" and "Mod LFO" both modulate the delay time, but in different ways. Use "Mod LFO" for more subtle modulation, such as a vibrato or tape wobble effect, and use "Delay" for more dramatic pitch changes.




Tap audio inputs and outputs are available in in mono, or dual dual mono where stereo or dual mono inputs are connected to the main audio in jacks.


## Visualising reverse delay slices

The key to understanding and using reverse delay is to remember that the reverse delay should end at twice the delay time you have set. So for a 1 bar delay the first transient of the input signal should arrive at the end of the second bar. As suggested earlier, especially when requiring "one-shot" reverse, think of reverse delay as the length of a record loop:  $1/4$  delay =  $1/4$  record time. This recording length needs to be at least as long as the input:

### Snare drum sample that is exactly $1/4$ ( $2/8$ ) in length at 120bpm Reverse delay set to $1/4$

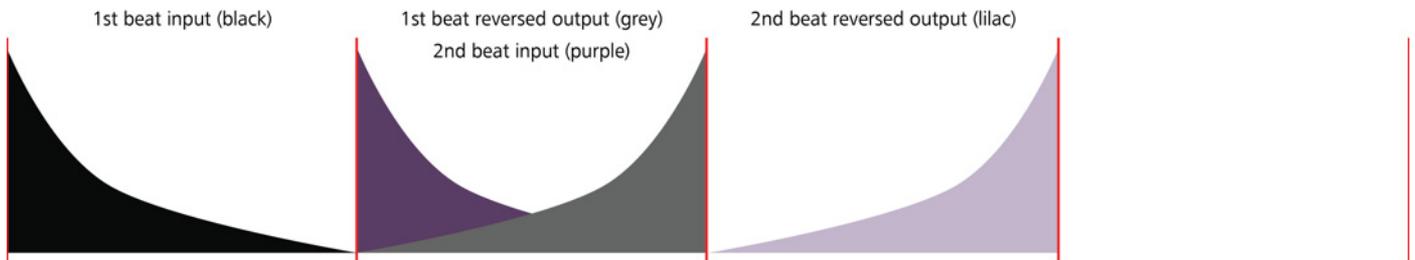

### Snare drum sample that is exactly $1/4D$ ( $3/8$ ) in length at 120bpm Reverse delay still set to $1/4$

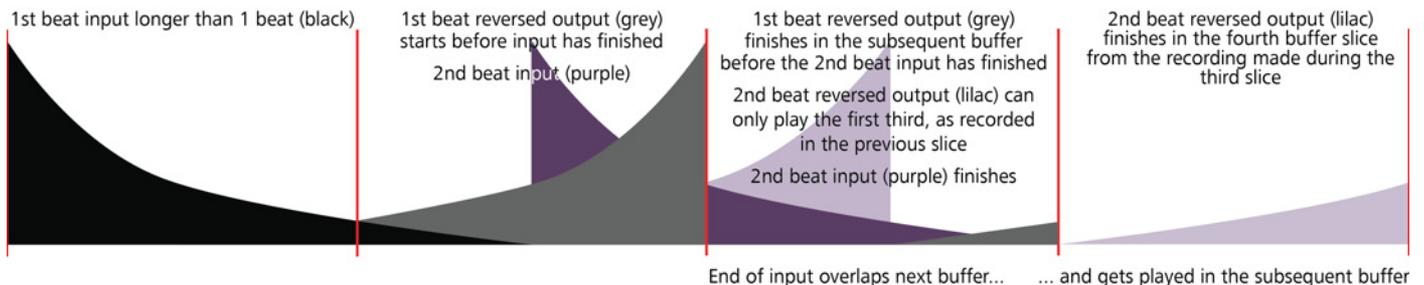

---

The graphic shows how setting a reverse time of  $1/4$  creates recording “slices” of  $1/4$ , that are replayed consecutively while recording a new slice in another buffer. The entire slice is reversed, so something at the beginning of the record buffer will be played at the end of the playback buffer.

The first example works as the length of the snare is equal to or less than the recording time of the slice. In the second example, to play the reverse correctly you should increase the delay time to  $3/8$ , to ensure the entire drum hit is still recorded in the same slice, otherwise the end of it will be in the subsequent slice, and the start of the reverse might be truncated. This is still a useful effect in its own right, but be aware of the pitfalls!

# Remote Mapping

---

```
/Remote Map template for      Effects      Jiggery-Pokery Sound: Titus BBD Delay Line
Scope Jiggery Pokery  com.jiggerypokery.Titus
//      Control Surface Item      KeyRemotable Item      Scale      Mode
//Map  _control_      Delay Mode
//Map  _control_      Delay Line Gate
//Map  _control_      DDL Type

//Map  _control_      Delay Time Mode
//Map  _control_      Stages
//Map  _control_      Time
//Map  _control_      Sync Duration
//Map  _control_      Sync Subdivision
//Map  _control_      Level
//Map  _control_      Pan
//Map  _control_      Feedback
//Map  _control_      THD
//Map  _control_      Tap Level In
//Map  _control_      Modulation Depth

//Map  _control_      Dry/Wet
//Map  _control_      Dry Signal Level
//Map  _control_      Dry Signal Pan
```

---

## Version history

1.0.1

- Set default ms value to useful instrument “doubling” value of 40ms

1.0.0

- Initial release

---

*Special thanks to the Steerpike testing and patch crew: Dogboy1973, JesseRyckman, Ozone0, meowsqueak, alteree, kylelee, NaviRetlav, xcountrycoach.*

*Titus BBD Delay* was designed and assembled by Jiggery-Pokery Sound, of London, England; DSP coding by Pitchblende Ltd, of Middle Earth.

### Jiggery-Pokery Sound



**JiGGERY·POKERY**

London, England.  
Email: [support@jiggery-pokery.com](mailto:support@jiggery-pokery.com)  
Web: [www.jiggery-pokery.com](http://www.jiggery-pokery.com)  
Twitter: @JiggeryPokerymb  
Facebook: JiggeryPokerySound

### Pitchblende



Wellington, New Zealand.  
Email: [contact@pitchblende.co.nz](mailto:contact@pitchblende.co.nz)  
Web: [www.pitchblende.co.nz](http://www.pitchblende.co.nz)  
Twitter: @PitchblendeLtd  
Facebook: PitchblendeLtd

# From the maker of ...

---

## Rack Extensions

- **Ammo 100LA Modulation Oscillator** - Portable single-channel oscillator for audio and CV rate synthesis and LFOs, featuring 128 waveforms
- **Ammo 400R Modulation Oscillators** - 4-channel LFO generator with audio output, featuring 136 waveforms and advanced modulation mixing
- **Ammo 1200BR Modulation Synthesizer** - Advanced 4-channel LFO generator and audio synthesizer adds S&H, Comparator and Electro-Switch
- **Anansi Mid/Side Mastering Router** - Mid/side audio router with mono compatibility check, 3-in merger and 3-out splitter
- **Charlotte Envelope Generator** - 9-stage EG with time, level, curve and velocity control per stage, and a priority-selectable MIDI-to-cv-pitch splitter
- **Chenille BBD Chorus Ensemble** - Realistic BBD chorus device, based on the 70s string synth ensembles and the classic Roland Dimension D rack unit
- **Combo Compact Organ** - The classic Italian transistor organ now in a brilliant, easy to use and equally compact Rack Extension format. Bags o' fun!
- **Combo Continental Organ** - The classic British transistor organ in a fantastic Rack Extension for that instant 60s feel!
- **Itsy Stereo/Phase Inverter** - L/R channel flip, cv-controllable 180° stereo inverting width adjust, stereo phase inverters and phase correlation metering
- **Loth CV Delay Splitter** - 4x4 channel cv splitter with independently adjustable gain and inversion controls, channel delay, and mirroring
- **Miranda CV Delay Merger** - 4x4 channel cv merger with independently adjustable gain and inversion controls, channel delay, and mirroring
- **Mordred Audio Bypass Merger** - 4 x 5 channel stereo audio merger with independently switchable outputs and autofade control
- **Shelob Audio Bypass Splitter** - 4 x 5 channel stereo audio splitter with independently switchable outputs, mirroring, and autofade control
- **Super-Spider Bundle** - Anansi, Itsy, Loth, Miranda, Mordred and Shelob: buy all six and get one and a couple of knobs on another absolutely free!
- **Steerpike BBD Delay Ensemble** - Vintage style 6-tap BBD device, with multiple delay modes including parallel, serial, and reverse
- **Titus BBD Delay** - A lightweight 1U delay device featuring a single Steerpike delay line, with reverse

## ReFills

- **Guitars vol.1+2: Stratocaster & Telecaster** - Multi-sampled guitars with slides, mutes, signature L6 effects and keyswitching
- **Elements?: Vector Synthesis Workstation** - Massive patch collection featuring Korg Wavestation/MS2000, Waldorf Blofeld and Roland SC-8850
- **Additions: Vintage Additive Synthesizers** - DK Synergy + Kawai K5m + Thor FM.
- **Blue Meanie: Virtually an ARP2600** - Thor and Kong-based analogue synth machine
- **Kings of Kong Classic Drum Machines\*** - the premier ReFill for Reason 5+, with over 50 classic beatboxes for Kong Drum Designer
- **Retro Organs v2**- Hammond B3 + Farfisa Combo Compact + Vox Continental in one brilliant ReFill. Also available for Reason Essentials
- **B3 Tonewheels v1.5** - the original 24-bit non-Leslie samples ReFill with advanced rotary speaker emulation
- **Farfisa Combo Compact Deluxe v1.5** - the complete set of original 24-bit Farfisa samples covering, both standard and Deluxe models
- **Vox Continental v1.5** - a complete set of original samples from the classic C300 organ, featuring original and extended Continental footages
- **Hammond Novachord\*** - the near-antique pre-WW2 monster polyphonic valve synthesizer
- **Retrospective: 40 years of Synthesizer History\*** - Over 1Gb of vintage samples from synths and electronic keyboards from the Hollow Sun archive

## FreeFills

- **Additives** - demo version of Additions: the fantastic Additives tracks from PUF Challenge #2 can be found at <http://soundcloud.com/groups/additives>
- **8-BIT Magic: The ZX Spectrum ReFill**
- **Classic Drum Machine Collection v1.1**
- **Eminent 310 Strings\*\* v3** - the classic Jarre string sound, with stereo samples plus the Oxygene II / Equinoxe 4 pizzicato lead
- **Harpe Laser\*\*** - the famous Laser Harp sound, the Elka Synthex preset 46 "Ring Mod"
- **Moog Taurus Bass Synthesizer\*\* v1.1**

---

For more information on these products and for direct downloads of these latest versions, plus a wide range of great Combinator skins, please visit [www.jiggery-pokery.com](http://www.jiggery-pokery.com)

\* Includes samples licensed from HollowSun.com

\*\* demo ReFills for Retrospective